

TECHNICAL SPECIFICATIONS
K-HIPRO 515






BUILT TO PERFORM



HIAB K-HIPRO 515

TECHNICAL DATA	K-HIPRO 515 2-4	
Max. lifting capacity (ft-lbs)	296 400	
Outreach, hydraulic extensions (ft)	82' 4"	
Lifting height above installation level (ft)	91' 0"	
Outreach / lifting capacity (ft-lbs)	One inner boom section extended	Two inner boom sections extended
	34' 4" - 6 800 43' 4" - 4 950 52' 2" - 3 800 60' 9" - 2 950 69' 3" - 2 300	43' 0" - 4 250 52' 2" - 3 050 60' 9" - 2 400 69' 3" - 1 960 77' 9" - 1 680
Slewing angle (°)	∞	
Height in parking position (in)	9' 3"	
Installation space needed (in)	42	
Weight, "standard" crane without stabilizers (lbs)	13 999	
Weight, stabilizer equipment (lbs)	1 742	
Outrigger spread (ft)	26' 3"	

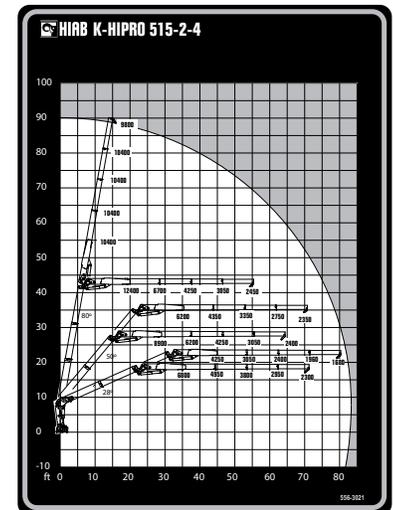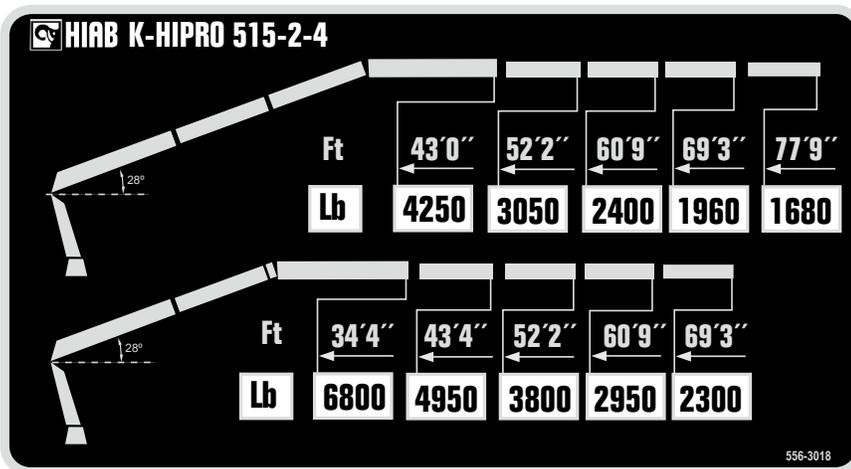

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999. Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

Hiab USA Inc
 12233 Williams Road
 Perrysburg, OH 43551 USA
 tel. 419 482 6000
 fax. 419 482 6001

www.hiab.us.com
 Hiab is part of Cargotec.
 www.cargotec.com

hiab.us.com



hiab.us.com

V2022.03.21