

TECHNICAL SPECIFICATIONS
HIAB X-HIPRO 352




BUILT TO PERFORM




HIAB X-HIPRO 352 BASIC DATA


TECHNICAL DATA	X-HIPRO 352E-5 + JIB 100X-2	X-HIPRO 352E-7
Max. lifting capacity (ft-lbs)	209 180	197 750
Outreach, hydraulic extensions (ft)	-	68' 11"
Outreach, with jib (ft)	64' 4"	-
Outreach / lifting capacity (ft-lbs)	55' 5" - 2 160 59' 9" - 1 980 64' 4" - 1 830 - - - - - -	10' 6" - 20 500 15' 9" - 13 890 21' 0" - 9 700 26' 11" - 6 940 33' 2" - 5 250 39' 8" - 4 100 46' 7" - 3 310 53' 10" - 2 730 61' 4" - 2 290 68' 11" - 2 030
Slewing angle (°)	420	420
Height in folded position (in)	102	94
Width in folded position (in)	99	100
Installation space needed (in)	54	52
Weight, "standard" crane without stabilizers (lbs)	10 250	9 350
Weight, stabilizer equipment (lbs)	1 000 - 1 230	1 000 - 1 230

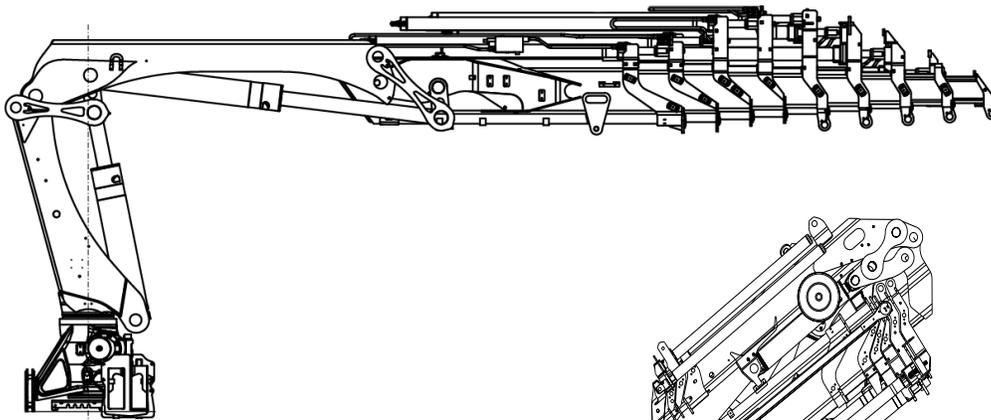

X-HiPro 352-8
Side View

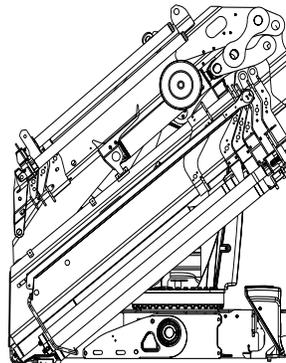

X-HiPro 352-8
Front View

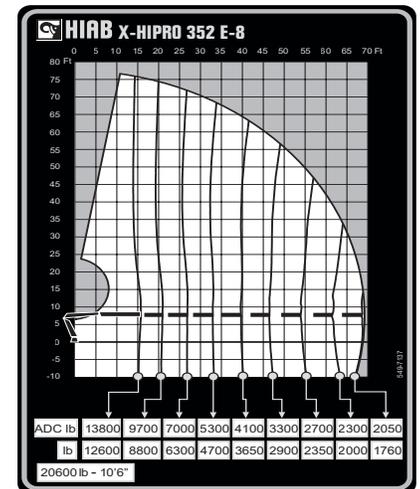

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



V2020.03.04