

TECHNICAL SPECIFICATIONS
HIAB X-HIPRO 358




BUILT TO PERFORM




HIAB X-HIPRO 358 BASIC DATA


TECHNICAL DATA	X-HIPRO 358E-5 + JIB 100X-2	X-HIPRO 358E-7
Max. lifting capacity (ft-lbs)	230 880	222 710
Outreach, hydraulic extensions (ft)	-	61' 4"
Outreach, with jib (ft)	64' 10"	-
Outreach / lifting capacity (ft-lbs)	55' 9" - 2 160 60' 0" - 1 980 64' 10" - 1 810 - - - - - -	9' 2" - 21 160 15' 5" - 14 330 20' 8" - 10 030 26' 7" - 7 280 32' 10" - 5 510 39' 4" - 4 370 46' 3" - 3 570 53' 6" - 3 000 61' 4" - 2 600
Slewing angle (°)	Continuous	Continuous
Height in folded position (in)	104	96
Width in folded position (in)	99	99
Installation space needed (in)	58	55
Weight, "standard" crane without stabilizers (lbs)	10 310	9 150
Weight, stabilizer equipment (lbs)	1 010 - 1 210	1 010 - 1 210

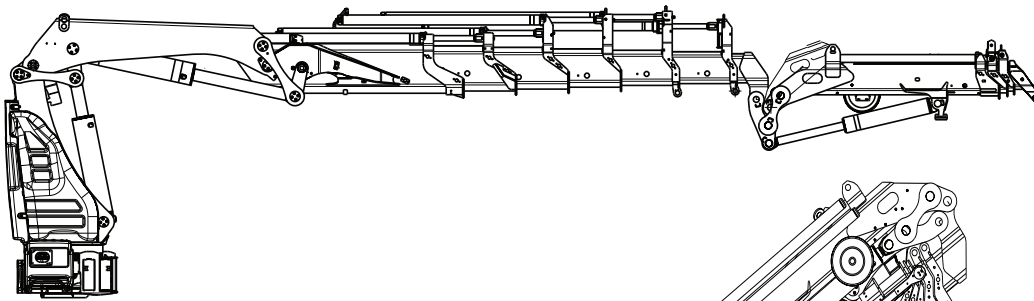

X-HiPro 358-5 + Jib 100X-2
Side View

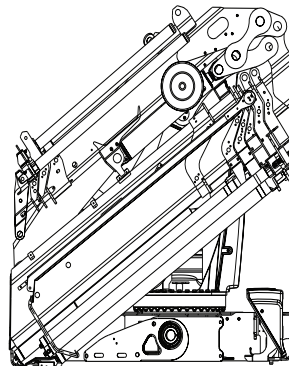

X-HiPro 358-5 + Jib 100X-2
Front View

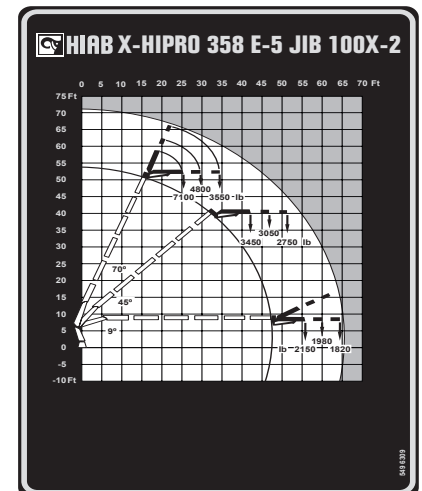

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001

