

TECHNICAL SPECIFICATIONS
HIAB 410K





BUILT TO PERFORM



HIAB 410K BASIC DATA

TECHNICAL DATA	410K
Max. lifting capacity (ft-lbs)	216 800
Outreach, hydraulic extensions (ft)	74' 2"
Outreach, manual extensions (ft)	-
Outreach, with jib (ft)	-
Outreach / lifting capacity (ft-lbs)	23' 4" - 10 140 40' 0" - 5 340 51' 6" - 3 660 63' 0" - 2 730 73' 10" - 2 250 - - -
Outreach / lifting capacity, with jib (ft-lbs)	-
Slewing angle (°)	450
Height in folded position (in)	108
Width in folded position (in)	100
Installation space needed (in)	40
Weight, "standard" crane without stabilizers (lbs)	10 800
Weight, stabilizer equipment (lbs)	1 370 - 1 410
Weight, jib (lbs)	-

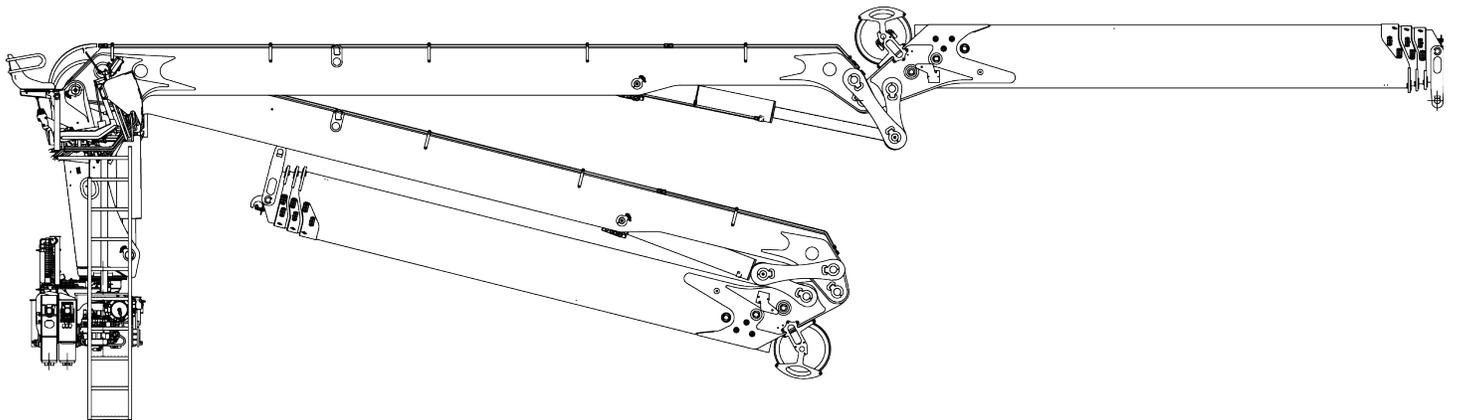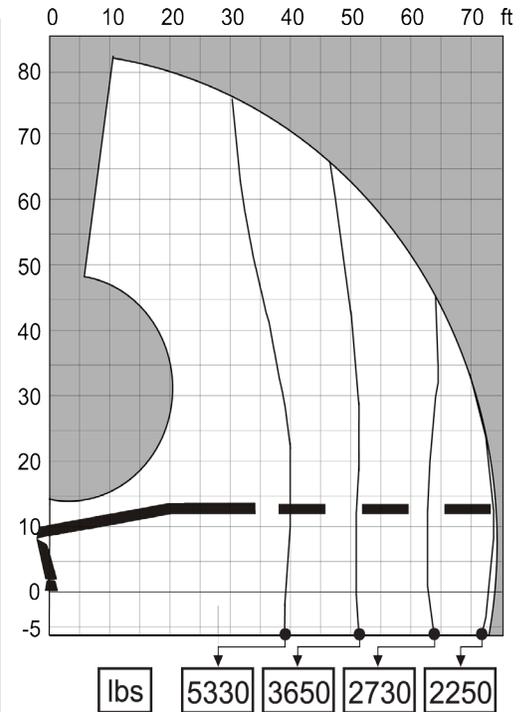

410K
Side View

Disclaimer. Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001 in fatigue class S2. Cargotec's certified Quality Assurance System complies with ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE marked and comply with the European Standard EN12999.

Hiab is the world's leading provider of on-road load handling equipment. Our high performance product range includes loader cranes, forestry and recycling cranes, demountables, truck mounted forklifts and tail lifts. We aim to set the industry benchmark for customer satisfaction by providing products and services that meet customer needs globally.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. +419 482 6000
fax. +419 482 6001



V2016.11.03