

TECHNICAL SPECIFICATIONS

MOFFETT M9 60.3 *NX* SERIES





BUILT TO PERFORM



MOFFETT

MOFFETT M9 60.3 **NX** SERIES

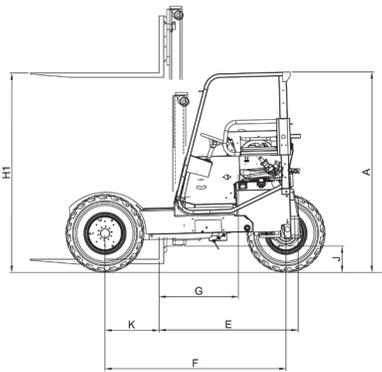

TECHNICAL SPECIFICATIONS		M9 60.3 NX STANDARD	M9 60.3 NX - COUNTERWEIGHT
1	Capacity @ 24" load center (lbs)	6 000	6 000
2	Kohler diesel engine (hp)	56	56
2a	Engine emission compliance	EPA Tier 4 Final	EPA Tier 4 Final
3	Maximum engine RPM	2 700	2 700
4	Electrical System (V)	12	12
5	Drive wheels	3	3
6	Steering	Hydrostatic	Hydrostatic
7	Tire type (tread) - STD Tire type (tread) - OPT	10 - 16.5 (SS) 31.5 x 13 - 16.5 (SS)	10 - 16.5 (SS) 31.5 x 13 - 16.5 (SS)
8	Tire, outside diameter (in) - STD Tire, outside diameter (in) - OPT	31 31.5	31 31.5
9	Tire, width (in) - STD Tire, width (in) - OPT	13 10	13 10
10	Maximum speed (mph)	11	11
11	Maximum gradability (%)	30	30
12	Turning radius (in)	98	98
13	Unladen weight (lbs)	7 690	8 170
14	Working pressure for attachments (psi)	2 500	2 500
15	Tilt of mast [forward/backward] (°)	10 / 8	10 / 8
16	Sideshift (in)	5	5
17	Fork section (in) [Class]	74 x 5 x 1.75 [PIVOT]	74 x 5 x 1.75 [PIVOT]
18	Mast carriage travel (in)	37	37
A	Height to top of overhead guard (in)	81	81
B	Fork carriage width (in)	PIVOT	PIVOT
C	Frame opening (in)	58	58
D	Overall width (in)	95	95
E	Overhang [rear wheel turned 180°] (in)	64	64
F	Wheelbase (in)	78	78
G	Center of gravity from fork face (in)	16.5	16.5
H1	Lift height (in)	124 (28 Freelift)	124 (28 Freelift)
H2	Mast height - collapsed (in)	78	78

NOTES: SF= Super Float, SS=Skid Steer, TG=Tractor Grip, RT=Rough Terrain.
Weights may vary depending on tire and/or fork option and are exclusive of (do not include) forks.
The above specifications are not binding upon the manufacturer and may be changed without prior notice.

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts, and MULTILIFT demountables, as well as DEL, WALTCO, and ZEPRO tail lifts.

www.hiab.us.com
Hiab is part of Cargotec.
www.cargotec.com



In less than a minute, the Moffett can mount or dismount a truck or trailer and be ready for work.

hiab.us.com

Hiab USA Inc
12233 Williams Road
Perrysburg, OH 43551 USA
tel. 419 482 6000
fax. 419 482 6001

hiab.us.com



V2022.01.01